



Larsen's® Fire Extinguishers — MP,DC & HT Series

Submittal and Detail Sheet

PROJECT: _____
 MODEL NUMBER: _____
 ARCHITECT: _____
 DATE: _____

LOCATION: _____
 QUANTITY: _____
 CONTRACTOR: _____
 DISTRIBUTOR: _____

MP SERIES-Multi-Purpose Dry Chemical

These units contain specially fluidized and siliconized mono ammonium phosphate powder which smothers and breaks the chain reaction on Class B fires, fuses and insulates Class A fires, and, as a non-conductor of electricity, is effective on Class C fires.


DC SERIES-Regular Dry Chemical

These units contain specially siliconized sodium bicarbonate powder with free flowing and non-caking additives, suitable for fires in flammable liquids, and energized electrical equipment.

All multi-purpose and regular dry chemical units feature: Heavy DOT steel cylinders * Rugged metal valves and siphon tubes * Replaceable molded valve stem seals * Corrosion and impact resistant polyester/epoxy paint finish Pull pin-upright squeeze grip operation * Approved to -65 degrees F. * Non-toxic * Pressure gauges * Contact factory if non-ferrous cylinders are required.

HT SERIES-Halotron I


Halotron I is an EPA approved clean agent which discharges as a rapidly evaporating liquid, leaving no residue. It effectively extinguishes Class A, B and C fires and is intended for use in areas formerly protected by Halon 1211.

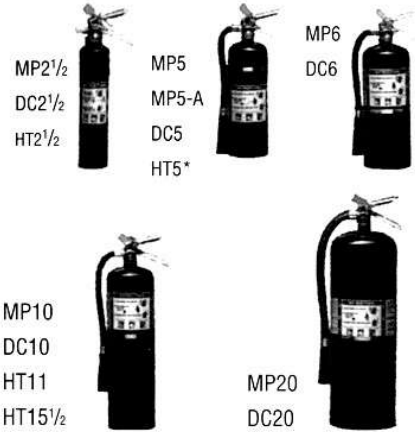


***Note:** HT5 is equipped with nozzle in lieu of hose and horn.

MODEL NUMBER	NOMINAL CAPACITY	SHIPPING WEIGHT	CYLINDER DIAMETER	OVERALL HEIGHT	OVERALL WIDTH	UL RATING	STANDARD BRACKET*	OPTIONAL BRACKET**
MP2½	2½ lbs.	5½ lbs.	3 in.	15½ in.	5¾ in.	1A-10B:C	817	860
MP5	5 lbs.	9¼ lbs.	4¼ in.	15¼ in.	7¼ in.	2A-10B:C	1521	B-2,818,821,860
MP5-A	5 lbs.	9¼ lbs.	4¼ in.	15¼ in.	7¼ in.	3A40B:C	1521	821,860
MP6	6 lbs.	12¾ lbs.	5 in.	16 in.	7¾ in.	3A-40B:C	5525	808,862
MP10	10 lbs.	18 lbs.	5 in.	20 in.	7¾ in.	4A-80B:C	5525	B-2, 846, 862
MP20	20 lbs.	38 lbs.	7 in.	23¾ in.	10¼ in.	20A-120B:C	1007	864
DC2½	2½ lbs.	5½ lbs.	3 in.	15½ in.	5-3/4 in.	10B:C	817	860
DC5	5½ lbs.	9½ lbs.	4¼ in.	15¼ in.	7¼ in.	40B:C	1521	B-2, 818, 821, 860
DC6	6 lbs.	13 lbs.	5 in.	16¼ in.	8½ in.	40B:C	1007	808, 862
DC10	10 lbs.	18 lbs.	5 in.	20 in.	7-3/4 in.	60B:C	5525	B-2, 846, 862
DC20	20 lbs.	38 lbs.	7 in.	23¾ in.	10¼ in.	120B:C	1007	864
HT2½	2½ lbs.	5½ lbs.	3 in.	15½ in.	5½ in.	2B:C	817	860
HT5	5 lbs.	9½ lbs.	4¼ in.	15¼ in.	5-3/4 in.	5B:C	818	860
HT11	11 lbs.	22½ lbs.	6 in.	21½ in.	9¼ in.	1A:10B:C	833	862
HT15½	15½ lbs.	27½ lbs.	6 in.	21½ in.	9¼ in.	2A:10B:C	833	862

STANDARD BRACKETS*

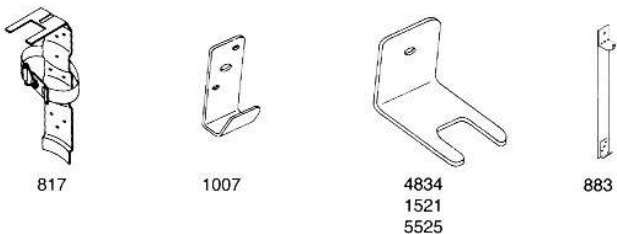

OPTIONAL BRACKETS*

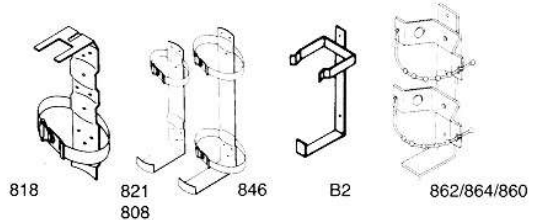

***NOTE:** Standard brackets are included with all extinguishers at no additional cost. If specified, optional brackets are only available at additional cost. All of the above brackets are designed to accommodate Larsen's extinguishers. While most comparably sized extinguishers usually will function with the above brackets, Larsen's cannot assume responsibility for variations in cylinder dimensions among various extinguisher suppliers.

LARSEN'S MANUFACTURING COMPANY
 7421 Commerce Lane N.E., Mpls, MN 55432
 Phone: (763) 571-1181 FAX: (763) 571-6900
www.larsensmfg.com

FLORIDA DIVISION:
 3130 N.W. 17th Street, Ft. Lauderdale, FL 33311
 Phone: (954) 486-3325 FAX: (954) 486-3352

©2004 Larsen's Mfg. Co.